


Rundstahlbügel

DIN 3570

Form A

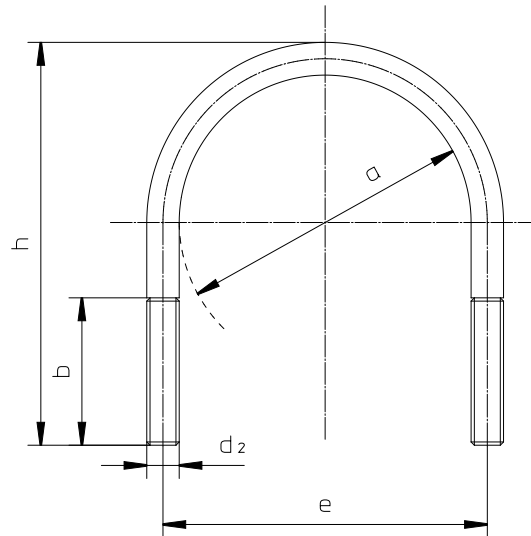

lichte Weite a	für Rohraussen- durchmesser	Nennweite DN	Zoll	Gewinde d ₂ x b	e	h	100 Stück ~ kg
25	21,3	15	1/2 "	M10 x 35	35	65	6
30	25	20		M10 x 40	40	70	9,4
	26,9	20	3/4 "			70	9,4
38	30	25		M10 x 40	48	76	10,5
	33,7	25	1 "			76	10,5
46	38	32		M10 x 50	56	86	12
	42,4	32	1 1/4 "			86	12
52	44,5	40		M10 x 50	62	92	12,9
	48,3	40	1 1/2 "			92	12,9
64	57	50		M12 x 50	76	109	22,2
	60,3	50	2 "			109	22,2
82	76,1	65	2 1/2 "	M12 x 50	94	125	25,9
94	88,9	80	3 "		106	138	28,8
120	108	100		M16 x 60	136	171	64
	114,3	100	4 "			171	64
148	133	125		M16 x 60	164	191	72,7
	139,7	125	5 "			191	72,7
176	159	150		M16 x 60	192	217	83,4
	168,3	150	6 "			217	83,4
202	191	175		M16 x 60	218	249	95,8
	193,7	175	7 "			249	95,8
228	216	200		M20 x 70	248	283	169,8
	219,1	200	8 "			283	169,8
282	267	250		M20 x 70	302	334	202,8
	273	250	10 "			334	202,8
332	318	300		M20 x 70	352	385	235
	323,9	300	12 "			385	235
378	355,6	350		M24 x 70	402	435	382
	368	350	14 "			435	382
428	406,4	400		M24 x 70	452	487	429
	419	400	16 "			487	429
530	508	500		M24 x 70	554	589	522
	521	500	20 "			589	522

Werkstoffe: Stahl S 235 JR roh, **galv.verzinkt (DISP)**, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571)