


Lüftungsrohrschellen mit Dämmprofil

Dämmung nach DIN 4109

mit Kombimutter

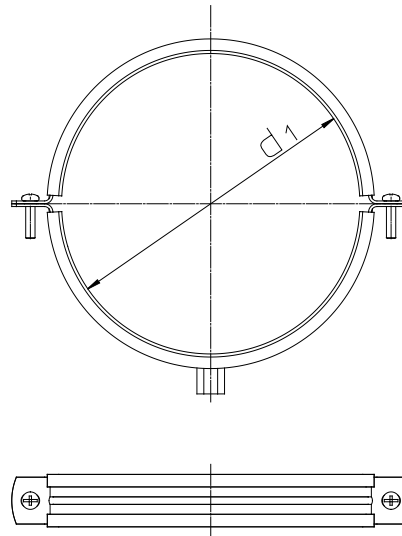

Artikel-Nr.	Nennweite d ₁	Material- stärke	Befestigungs- mutter (Kombi)	100 Stück ~ kg
79491	80	25 x 1,5	M8 / M10	15,13
79492	90			19,06
79493	100			18,06
79494	112			21,87
79495	125			22,81
79496	140			28,77
79497	150			25,41
79498	160			26,96
79499	180			33,63
79500	200			30,43
79501	224			37,7
79502	250			41,66
79503	280			46,84
79504	300			51,56
79505	315			53,41
79506	355			60,46
79507	400			66,54
24637	450	25 x 2,5		105,79
24638	500			116,96
24639	560			130
24640	600			133,78
24641	630	25 x 3,0		165,83
24642	710			186,5
24643	800			211
24644	900			264
24645	1000	30 x 3,0		278,67
24646	1120			260
24647	1250			356

Werkstoffe: Schelle: Stahl S 235 JR galv.verzinkt (DISP),
A2 (1.4301), A4 (1.4571)
Gummi: EPDM