


Rohrschellen

DIN 3567

Form A

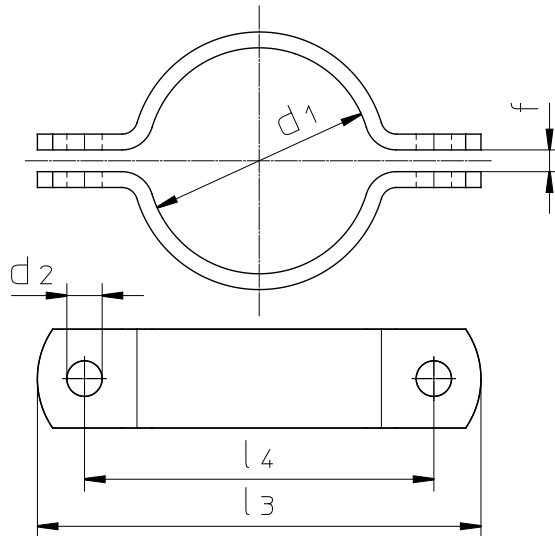


d ₁	Nennweite DN	Zoll	l ₃	l ₄	d ₂	f	Material- stärke	Zubehör: Sechskant- schrauben	100 Paar ~ kg
20	15		87	57	11,5	7	30 x 5	M10 x 30	19
22	15	1/2 "	89	59					20
25	20		92	62					21
27	20	3/4 "	96	66					22
30	25		98	68					23
34	25	1 "	102	72					24
38	32		106	76					26
43	32	1 1/4 "	112	82					27
45	40		114	84					28
49	40	1 1/2 "	118	88					30
57	50		140	104	14	9	40 x 6	M12 x 35	54
61	50	2 "	144	108					55
77	65	2 1/2 "	158	122					60
89	80	3 "	172	136					70
108	100		220	172	18	11	50 x 8	M16 x 45	140
115	100	4 "	226	178					145
133	125		244	196					168
140	125	5 "	252	204					180
159	150		270	222					200
169	150	6 "	280	232					205
194	175	7 "	306	258					240
216	200		328	280					255
220	200	8 "	332	284					260
267	250		402	342					360
273	250	10 "	408	348	23	14	60 x 8	M20 x 50	390
318	300		452	392					435
324	300	12 "	458	398					445
356	350	14 "	492	432					508
368	350		504	444					52
407	400	16 "	570	498					840
419			582	510	27	18	70 x 10	M24 x 60	860
458	450	18 "	620	548					910
508	500	20 "	672	600					1010
521	500		686	614					1020
610	600	24 "	782	710					1300
711	700	28 "	884	812					1500
813	800	32 "	985	913			80 x 12	M24 x 80	2230

Werkstoffe: Stahl S 235 JR, roh, grundiert, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571), 15Mo3

Rohrschellen

DIN 3567 ähnlich

Form A

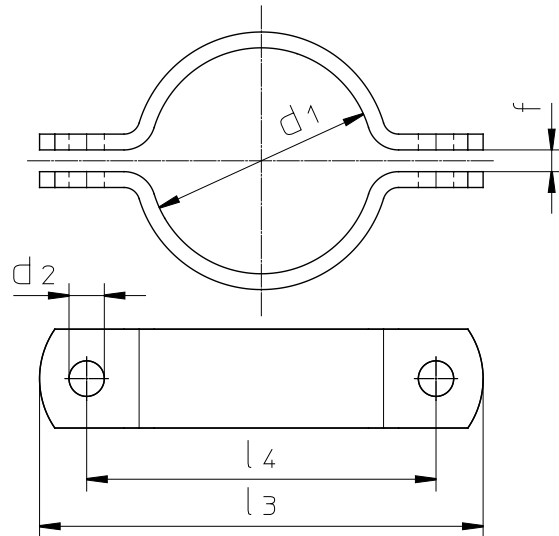


d ₁	l ₃	l ₄	d ₂	f	Material- stärke	Zubehör: Sechskant- schrauben	100 Paar ~ kg
12	79	49	11,5	4	30 x 3	M10 x 30	11
14	81	51					12
16	83	53					13
18	85	55					15
54	134	98	14	9	40 x 6	M12 x 35	53
70	155	119					58
82	166	130					65
95	184	148					80
102	214	166	18	11	50 x 8	M16 x 45	138
121	240	192					160
154	263	215					178
184	307	259					228
205	323	275	23	14	60 x 8	M20 x 50	248
245	380	320					340
255	390	330					350
299	434	374					410
306	441	381	27	18	70 x 10	M24 x 60	420
356	492	432					510
384	519	459					570
458	620	548					910

Werkstoffe: Stahl S 235 JR, roh, grundiert, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571), 15Mo3

Rohrschellen

DIN 3567

Form B

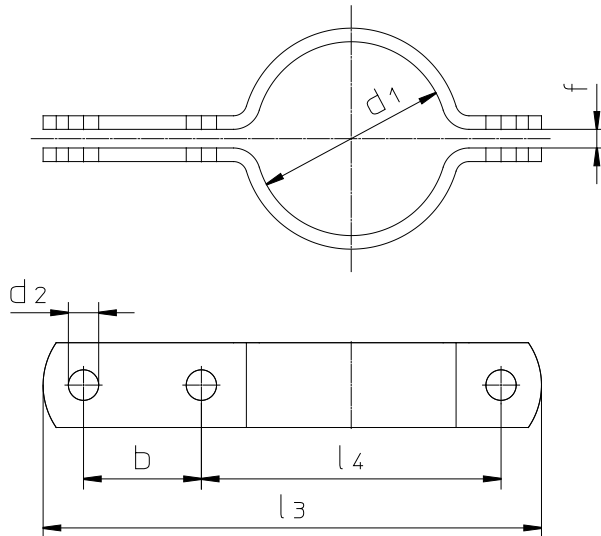


d ₁	Nennweite DN	Zoll	l ₃	l ₄	b	d ₂	f	Material- stärke	Zubehör: Sechskant- schrauben	100 Paar ~ kg
20	15		133	57	46	11,5	7	30 x 5	M10 x 30	28
22	15	1/2 "	135	59						29
25	20		138	62						31
27	20	3/4 "	142	66						32
30	25		144	68						33
34	25	1 "	148	72						35
38	32		152	76						36
43	32	1 1/4 "	158	82						38
45	40		160	84						39
49	40	1 1/2 "	164	88						40
57	50		194	104	54	14	9	40 x 6	M12 x 35	76
61	50	2 "	198	108						77
77	65	2 1/2 "	212	122						85
89	80	3 "	226	136						95
108	100		290	172						203
115	100	4 "	296	178	70	18	11	50 x 8	M16 x 45	206
133	125		314	196						220
140	125	5 "	322	204						225
159	150		340	222						240
169	150	6 "	350	232						252
194	175	7 "	376	258						280
216	200		398	280						300
220	200	8 "	402	284						310
267	250		488	342						440
273	250	10 "	494	348						450
318	300		538	392	86	23	14	60 x 8	M20 x 50	490
324	300	12 "	544	398						510
368	350		590	444						595
407	400	16 "	674	498						960
419			686	510						980
521	500		790	614	104	27	18	70 x 10	M24 x 60	1150

Werkstoffe: Stahl S 235 JR, roh, grundiert, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571), 15Mo3

Rohrschellen

DIN 3567

Form C

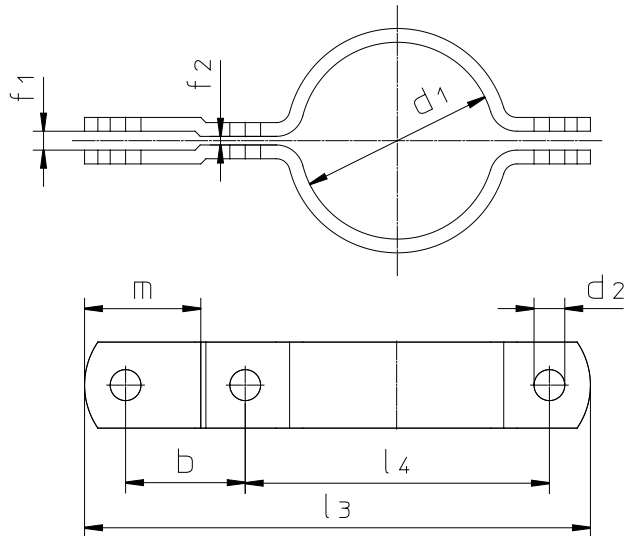


d ₁	Nennweite DN	Zoll	l ₃	l ₄	b	d ₂	f ₁	f ₂	m	Material- stärke	Zubehör: Sechskant- schrauben	100 Paar ~ kg
20	15		133	57	46	11,5	7	4	44	30 x 5	M10 x 30	28
22	15	1/2 "	135	59								29
25	20		138	62								31
27	20	3/4 "	142	66								32
30	25		144	68								33
34	25	1 "	148	72								35
38	32		152	76								36
43	32	1 1/4 "	158	82								38
45	40		160	84								39
49	40	1 1/2 "	164	88								40
57	50		194	104	54	14	9		52	40 x 6	M12 x 35	76
61	50	2 "	198	108								77
77	65	2 1/2 "	212	122								85
89	80	3 "	226	136								95
108	100		290	172								203
115	100	4 "	296	178	70	18	11	5	68	50 x 8	M16 x 45	206
133	125		314	196								220
140	125	5 "	322	204								225
159	150		340	222								240
169	150	6 "	350	232								252
194	175	7 "	376	258								280
216	200		398	280								300
220	200	8 "	402	284								310
267	250		488	342								440
273	250	10 "	494	348								450
318	300		538	392	86	23	14	6	84	60 x 8	M20 x 50	490
324	300	12 "	544	398								510
368	350		590	444								595
407	400	16 "	674	498								960
419			686	510	104	27	18	7	98	70 x 10	M24 x 60	980
521	500		790	614								1150

Werkstoffe: Stahl S 235 JR, roh, grundiert, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571), 15Mo3

Rohrschellen

DIN 3567

Form D

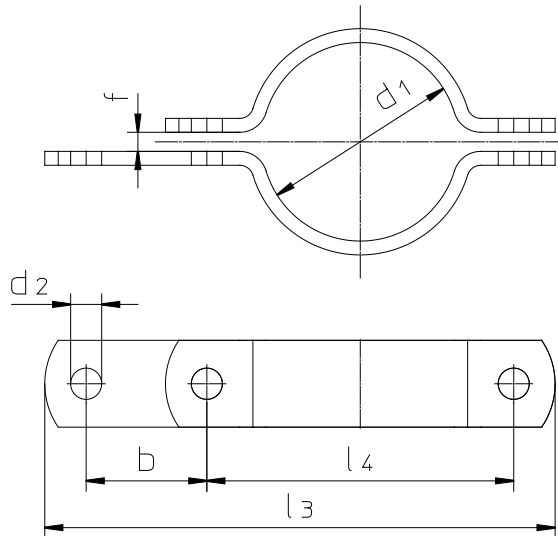

d ₁	Nennweite DN	Zoll	l ₃	l ₄	b	d ₂	f	Material- stärke	Zubehör: Sechskant- schrauben	100 Paar ~ kg
20	15		133	57	46	11,5	7	30 x 5	M10 x 30	24
22	15	1/2 "	135	59						25
25	20		138	62						26
27	20	3/4 "	142	66						27
30	25		144	68						28
34	25	1 "	148	72						30
38	32		152	76						31
43	32	1 1/4 "	158	82						33
45	40		160	84						34
49	40	1 1/2 "	164	88						35
57	50		194	104	54	14	9	40 x 6	M12 x 35	65
61	50	2 "	198	108						66
77	65	2 1/2 "	212	122						73
89	80	3 "	226	136						83
108	100		290	172						172
115	100	4 "	296	178	70	18	11	50 x 8	M16 x 45	175
133	125		314	196						195
140	125	5 "	322	204						203
159	150		340	222						220
169	150	6 "	350	232						229
194	175	7 "	376	258						260
216	200		398	280						278
220	200	8 "	402	284						285
267	250		488	342						400
273	250	10 "	494	348						420
318	300		538	392	86	23	14	60 x 8	M20 x 50	463
324	300	12 "	544	398						478
368	350		590	444						558
407	400	16 "	674	498						900
419			686	510	104	27	18	70 x 10	M24 x 60	920
521	500		790	614						1085

Werkstoffe: Stahl S 235 JR, roh, grundiert, feuerverzinkt (TZN), A2 (1.4301), A4 (1.4571), 15Mo3