


Massivrohrschellen mit Dämmprofil

Dämmung nach DIN 4109

FRSM mit Kombimutter
Fabrikat Fischer

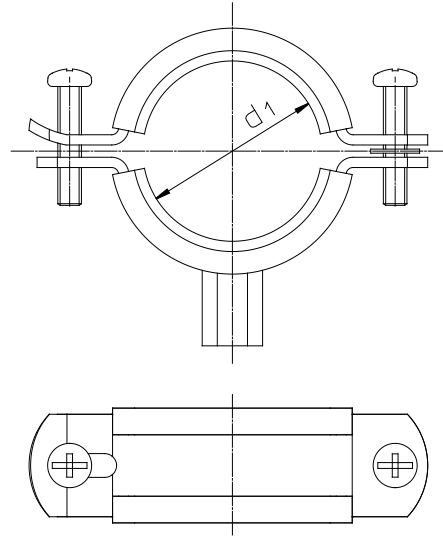

Artikel-Nr.	Zoll	Spannbereich d ₁	Material- stärke	Befestigungs- mutter (Kombi)	100 Stück ~ kg
504589	1/2 "	19 - 23	25 x 2,5	M10 / M12	12,28
504590	3/4 "	24 - 29			14,22
504591	1 "	33 - 36			15,89
504592	1 1/4 "	40 - 45			19,42
93700	1 1/2 "	47 - 52			17,5
93701		53 - 58			18,9
93702	2 "	60 - 65			20,4
93703	2 1/2 "	73 - 78	30 x 3,0		34
504593		79 - 85			35
93704	3 "	88 - 93			36,05
93705		100 - 106			43,3
93707	4 "	108 - 116			44,54
93709		124 - 129			50,8
93710		131 - 137			51,98
93711	5 "	138 - 145			52,5
93712		156 - 162			58,2
93713	6 "	165 - 171			62,4
93714	7 "	188 - 194	68		
93715		196 - 203	70,89		
505453		205 - 214	40 x 4,0	M12 / M16	140
505454	8 "	219 - 225			153
505455		244 - 250			167
505456	10 "	267 - 273			177,7
505457		297 - 304			198
505458	12 "	320 - 328			209,6
504594		348 - 356	50 x 5,0	M16	k.A.
504595		364 - 372			k.A.
504596		400 - 409			k.A.
504597		454 - 462			k.A.
504598		500 - 508			k.A.

Werkstoffe: Schelle: Stahl S 235 JR galv.verzinkt (DISP)
Gummi: EPDM